

台灯无线充电器

Table lamp Wireless charger

使用说明书

Instruction Manual



Type: G2

G2 台灯无线充电器使用说明书

(G2 Table lamp Wireless charger instruction Manual)

1. 产品简介 Description


1.1 概要 outline

G2 是一款集台灯和无线充为一体的高性能产品，适用于各种手机充电。G2 采用自适应控制技术，控制精度高，能提供精确可靠的充电，保护和延长电池寿命。

G2 table lamp wireless charger is a perfect type which with lamp and wireless function, it is suitable for all type mobiles, it can automatic match different charging requirement, The G2 charger can protect the mobile well and prolong the using time of mobile battery.

2. 功能介绍

Function description

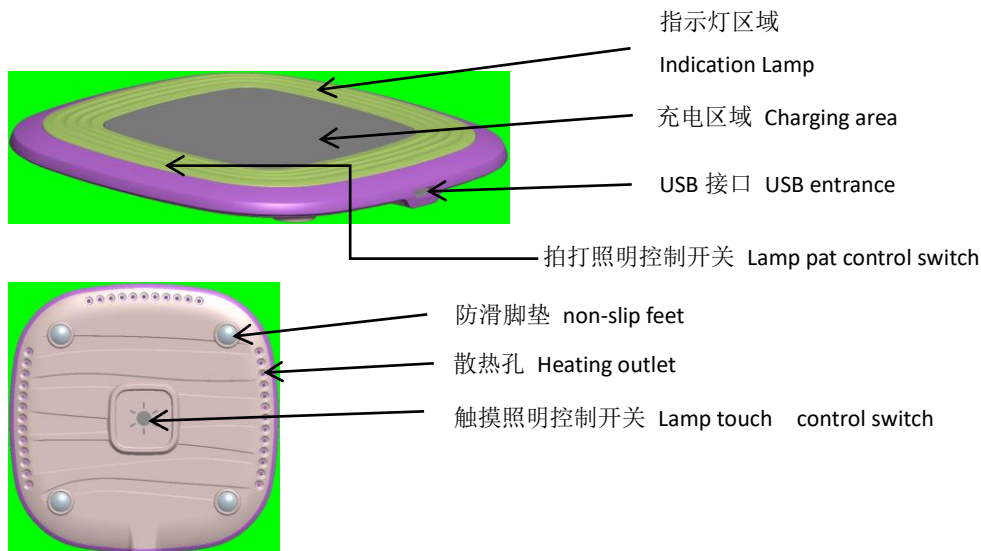

3. 使用方法 use instruction

3.1 充电功能 (Charge function)

3.1.1 将手机放在充电区域上面，使手机和无线充的充电区域相接触。

Placed the mobile on the charge area

3.1.2 当手机充电时，手机显示充电，无线充充电指示灯为呼吸灯状态，当电池充满时呼吸灯灭。The indication lamp will appear like breathing when charging function is on, the indication lamp will off when finished charging

3.1.3 当充电指示灯闪烁时说明充电异常。

When the charging function is abnormal, The indication lamp will shining

3.1.4 发射器的控制芯片温度高于 80°C 时，发射器停止工作，温度降低到正常状况，五分钟后，发射器恢复正常工作。

The charge function will lose when the temperature is beyond 80 degree, you should cool down the charger at least 5 minutes, then the charger will reset to normal state

3.2. 照明灯功能 lamp function

3.2.1 通电后，照明灯为触摸控制模式，短按照明控制开关一次，随即唤醒触摸按键功能：短按第 1 次，进入一档小夜灯；短按第 2 次，进入二档氛围灯；短按第 3 次，进入三档照明灯；短按第 4 次，关闭照明灯。如此循环。

Light of lamp touching control information

Short touch the lamp control switch area =lamp function on
Touch one time =Minimum light on
Touch two times =medium light on
Touch three times =Largest light on
Touch four times = lamp function off

3.2.2 触摸控制模式下，长按 3 秒照明控制开关，指示灯闪 3 下后进入拍拍灯模式：轻拍第 1 次，进入一档小夜灯；轻拍第 2 次，进入二档氛围灯；轻拍第 3 次，进入三档照明灯；轻拍第 4 次，关闭照明灯。如此循环。

Light of lamp patting control information

Long pat the lamp switch area =lamp function on
Pat one time = Minimum light on
Pat two times =medium light on
Pat three times =Largest light on
Pat four times = lamp function off

3.2.3 拍拍灯模式下，长按 3 秒照明控制开关，指示灯闪 2 下后进入触摸控制模式。

Long touch the lamp switch 3 seconds, then the unit changes to touch state with the indication light will appear two times,

4 技术参数 (Technical data)

输入电压/电流	输出电压/电流	充电距离
5V/2A, 9V/1.67A	(QC2.0/3.0 适配器)	≤8MM
Input voltage/current	Output voltage/current	Effective distance
工作温度 0°C\40°C	储存温度 -20°C\80°C	
Temperature	store temperature	
工作湿度	储存湿度 Humidity	
Humidity	10%\70%RH	10%\80%RH

5. 金属检测 Metal automatic check

当发射器线圈上探测到大于硬币大小金属物，发射器停止工作，金属物移除后，发射器恢复正常工作。

The charger will turn off when metal on the top surface of charger, the charger will reset to normal state after removing the metal from the charger

6. 输出过流保护 Overloading protection

接收器输出电流大于 1.3A 前，发射器停止工作，当接收器移除后，发射器将恢复正常工作。

The charger will turn off when the output current is beyond 1.3A, the charger will reset to normal state after removing the overload.

Manufacturer : ShenZhen Groom Industrial Design Company

Contact phone:

Internet:

Version:07/2019